DELUXE ALUMINUM TELE-OUTRIGGERS

INSTALLATION & CARE INSTRUCTION GUIDE





WARNING:

This product can expose you to chemicals including Lead, which is known to the State of California to cause cancer, birth defects or other reproductive harm. For more information go to ww.P65Warnings.ca.gov.





Thank you for purchasing the Deluxe Aluminum Tele-Outriggers by TACO Marine. Since 1959, we have taken great pride in offering the highest-quality products with excellent customer service. We stand behind our products 100 percent. Please visit our website **tacomarine.com** for more detailed information on a wide variety of products and to register your new accessory for warranty.

WARNING:

- High-speed cruising in rough seas is not recommended.
- High-speed cruising with the outriggers fully extended can cause possible damage to the outrigger sections and internal components of the aluminum construction.
- Retract your outriggers before operating under those conditions.
- Excessive release clip tension or faulty clips can cause unnecessary loads on outriggers and mounts. Adjust and check clips before each use.
- Do not dent any of the tubes.
- Do not tamper with the swivel rings, as they are preset during assembly.
- It is always recommended to remove the outriggers from the mounts when trailering. Loads are higher when trailering than boating.
- Aluminum poles are good conductors of electricity. Avoid use of the poles during lightning storms as a safety measure.




Whenever possible, extend the Tele-Outriggers while in the product or free-standing position. Gently pull to the end of each section, keeping the swivel rollers lined up in the down position. Once in position, rotate until spring-loaded locking buttons engage.

How to use

with a Premium / Standard TACO Rigging Kit

The pad eye that the bungee hooks onto is usually installed on the gunwale, about 6" toward the stern, between the outrigger holder and the rod holder. On the T-top, the pad eye is usually hooked onto the outer T-top ring so it can be easily reached.

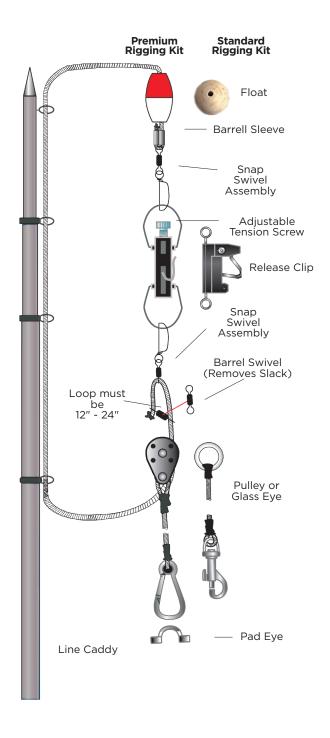

MAINTENANCE

The poles should not be kept on the boat all year long

in their extended position unless the boat is used very frequently.

High speed cruising

in rough seas is not recommended with the poles in the fully extended open position, as this can cause excessive stress on the poles and internal components.

Outrigger rigging lines should not constantly have excessive tension

with unnecessary loads of pressure on the outriggers and mounts. Adjust and check the tension on your outrigger lines and clips before each use for proper settings.

Avoid any heavy contact that can dent

any of the poles, as this can cause a weak point in the Aluminum structure of the pole.

Do not tamper with the stainless collars

and the swivel roller mechanism. The collars are intended to keep each section of the poles in place and they thread in by hand tightening. Always make sure if you remove a stainless collar that there is no cross threading when it is re-attached.

Whenever possible, extend the Aluminum Tele-Outriggers

while inside the mount or free-standing. Gently extend each section to the end of each pole until the internal locking pin pops out. This will serve as an indicator that the pole sections are properly locked into place.

Aluminum Tele-Outriggers should be retracted

before operating the boat in long destination runs or under rough sea conditions.

Outrigger Line Storage:

If the boat will not be used for an extended period of time or put in storage for the winter season, it is recommended that the poles be retracted and stored away in their retracted position. TACO Aluminum Tele-Outriggers are supplied with a pair of line caddies on each pole for storing the excess outrigger line. The line caddies are located on the bottom section of each pole and can be distanced apart by sliding them up or down the first section of the outrigger pole. Once you set the desired distance, tighten down the line caddies and begin to wrap the outrigger lines around each hook end. You should end with a shock cord pulley in your hand, which can stretch and connect to either end of the line caddy.

Winterizing:

If the boat is kept outdoors in areas of freezing temperature during the winter, it is recommended that the poles are retracted and removed from the boat while boat is not in use. If you are using TACO mounts and are going to remove the outrigger poles for the winter, it is recommended that the tubes on the mounts be left at a slightly downward position to prevent winter rain from building up inside the tubes and turning to ice, which can expand the diameter of the poles and damage or crack them.

How to clean

With fresh water and marine-grade boat soap that dissolves salt deposits, spray or apply on the fully extended poles directly after each use. Then rinse off with fresh water and allow to dry before storing the poles. Salt solvent solutions such as Salt Terminator, Salt Away and Salt Off are also recommended, as they also leave a protective PTEF (Teflon) coating to helps repel future salt and dirt grime from building up again.

Safe Cleaners

Harmful Cleaners

Mild dish washing liquid, specialty marine cleaners: Sea Safe Boat Wash, Boat Wash Concentrate and Super Suds.

Safe marine lubricants:

CRC Corrosion Inhibitor, Corrosion Block and Get Some Extreme.

Bleach (Clorox, etc.) and mild abrasive cleaners: Ajax, Comet, Soft Scrub, Rubbing Compounds, etc.

Strong cleaners:

409, Engine Degreasers, etc.

Acids of any type:

Such as Muriatic, naval jelly or aluminum acid.

NOTE:

For extra protection, spray all exterior stainless and brass components and pop out pins in each pole section with a quality marine-grade lubricant that does not wash off with rainwater. Then lightly wipe down with soft cloth. (Silicon based lubricants are not recommended.)

Need Support?

Contact Us

- support@tacomarine.com
- https://tacomarine.com/technical-support
- 3020 North Commerce Parkway Miramar, FL. 33025
- @tacomarine
- @taco_marine

TACO Marine®

